

Standard Herringbone / Single Brick Patterns

Double End Grooved, Nydree Acrylic Impregnated Engineered Flooring can be used to make any standard herringbone or single brick pattern. The plank used for standard herringbone and single brick patterns must be ordered as one fixed length. This length is typically a multiple of the width, however any length from 12" to 47" may be specified for use in standard herringbone and single brick patterns. (Typical specified fixed lengths are 23" and 47". Keep in mind that there is an up charge for fixed length plank.)


Certain patterns require the use of splines (**provided with the shipment when specified on order**) to "lock in" the floor and minimize overwood. The use of splines, when required, will provide sound, trouble-free installations.

If the direction of the tongue is alternated on adjacent rows and the ends of the previous row are locked in, no splines are needed for the basic herringbone pattern. See diagram below. No splines are required for single brick patterns.

Correct



Incorrect

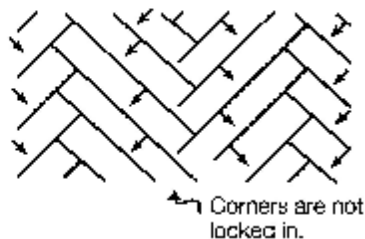

Arrow indicates direction of the tongue.

Double Herringbone

Splines are required on double herringbone patterns where the edge is not locked in.

There are certain patterns that require a fixed length that is a multiple of the width. (Typical sizes are 2 2/3" x 15.96", 2 2/3" x 18.62", 4" x 16" and 4" x 20". Keep in mind that there is an up charge for fixed length plank.)

Basket Pattern, Double Brick or Triple Brick

Splines are required to lock in the ends.

Parquet Pattern (Cube)

Splines are required along the sides where groove side meets grooved ends.

See instructions in every carton for subfloor preparation, installation using Nydree Flooring UP-28 adhesive, and maintenance procedures depending on surface finish (Oil Finish or Pedestrian Finish).